


▶ Knockout Seal

Standard: UL 514B and C22.2 No. 18.3-12

Material: Steel

Application: for use to cover exposed knockout hole in a box or enclosure

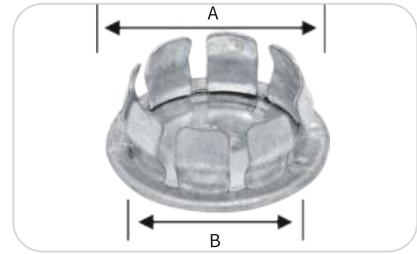

EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
KS01	1/2"	100	1000	1.071	0.866
KS02	3/4"	50	500	1.303	1.102
KS03	1"	50	500	1.528	1.358

▶ Offset Nipple

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use to connect two boxes or enclosures when knockouts are not in line



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
FTN01	1/2"	20	200	2.402	1.000
FTN02	3/4"	10	100	2.402	1.220
FTN03	1"	10	100	2.717	1.525
FTN04	1-1/4"	1	40	2.795	1.910
FTN05	1-1/2"	1	40	3.031	2.125
FTN06	2"	1	10	3.150	2.665

▶ Box Spacer Connector

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: used as a short raceway to connect electrical junction boxes or enclosures



EVT#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
BBC01	1/2"	1	100	1.165	0.200
BBC02	3/4"	1	100	1.162	0.290